


Smart Wall Plug (USA Type)

For WL-ZSKMNPW-M3140-01
WL-ZSKMNPW-M3141-01

User Manual




Features

- Support IEEE 802.15.4 ZigBee/SmartRoom protocol.
- Power has the overload protection function. Can monitor the present power & electric quantity in real time. It saves energy and keeps away from stand-by power consumption (This function is for metering type).
- Remotely control connecting to power, or shutting down power for home appliances by smart home APP. Auto-timing control function of energy saving makes common appliances smart.
- Real-time feedback on ON/OFF status supports connecting to power, or shutting down power for plug via LAN & remote control.
- Customize contextual mode, support joining scene mode, have functions such as reservation & timing, electric energy statistics, and view history.
- Smart DIY, easy to operate, simple and beautiful APP interface.
- Exquisite in appearance and design, this product merges perfectly with all decoration styles. Be compatible with more home appliances for more convenience for user.
- Made of high shock-resistance material, shell is sturdy and durable.


Product Parameter

Communication Protocol	IEEE 802.15.4 (ZigBee/SmartRoom)	Material & Color	PC+ABS、 White
Antenna Type	PCB Antenna	Flame Retardant Rating	UL94 V-0
Power Parameter	120-125VAC, 60Hz	Net Weight (g)	150
Maximum Rated Current	15A	Weight (g)	180
Standby Power Consumption	≤0.3W	Operating Temperature	-10℃ ~+45℃
Overall Dimension (L×W ×H, mm)	123×57.2×62.3	Operating Humidity	≤95%RH (Noncondensing)
Maximum Resistive Load	1800W (Incandescent Lamp/Halogen Lamp)		
Maximum Inductive/ Capacitive Load	1000W(Energy Saving Lamp/Fluorescent Lamp/LED)		


Package List



Smart Wall Plug (USA Type)*1





Manual *1




Guarantee Card*1

Function / Installation Illustration

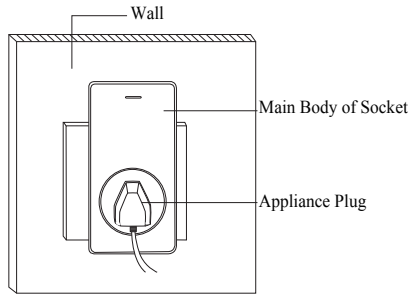

Network Setting


1.Add ZigBee Network for the First Time

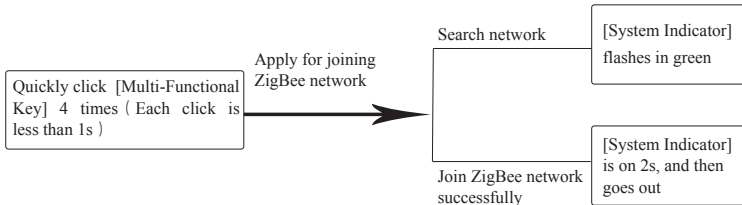

Notes:


Before setting, please make sure the gateway (additional purchase) works normally. Ensure that power is supplied to this product, and it is within effective communication range of the gateway.

2.Binding

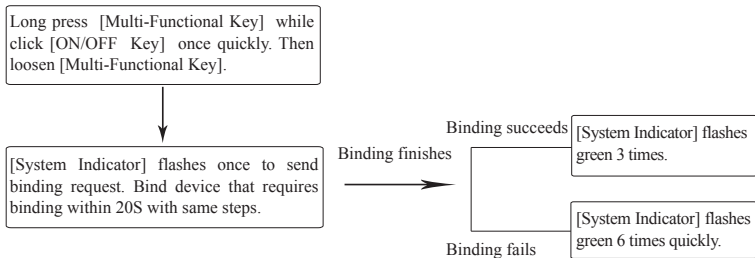

Notes: Operating methods of unbinding is same as that of binding.

3.Exit ZigBee Network and Restore to Factory Setting

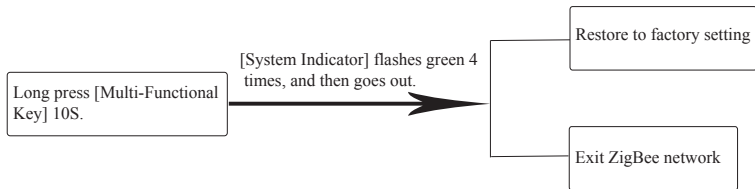

Notes: The default factory setting does not join ZigBee network.

User Guide

1. Press [ON/OFF Key], and this product is connected to power, then [System Indicator] stays blue. Press [ON/OFF Key] again, and shut down power, then [System Indicator] goes out.

2. User can check real-time power and used electricity of appliances at work by smart mobile terminals to save more energy. When load power reaches 3000W, this product will shut down load automatically to protect device (This function is only for metering type).

Installation Cautions

- Please keep this product far away from the area that have interference source like washing machine, microwave oven, refrigerator and router, or it will affect sensitivity and working performance of the product.
- This product should be installed in dry and clean place to prevent inner component from dampness or other debris.
- Wipe the dust on the product by soft cloth. Cleaning by the corrosive cleansing liquid and other chemical solvent is forbidden.
- If this product breaks down, non-professional staff shall not handle it. Send it to local service center for repair, or contact our customer service staff.

