




(All photos here are for reference only, Specifications are subject to the physical product)

## **Vertical Type Gateway**


### **Manual Guide**

## Function Diagram

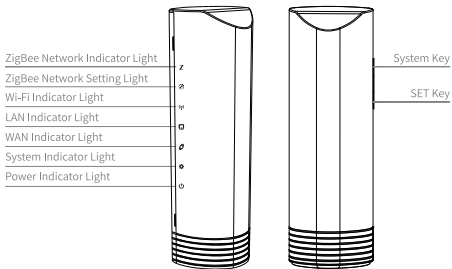


## Bind and login gateway

### ● Satart

**Step 1:** Power on,  the Power Indicator Light will stay in green,  System Indicator Light will flash.

**Step 2:** Turn on your devices (smart phone, pad, notebook, etc.) Wi-Fi and search the Wi-Fi network of this gateway.




**Note:**

1. Wi-Fi Indicator Light stay in green: the gateway can work;  
System Indicator Light flash 1s/second: failed to connect with server;  
System Indicator Light stays in green: connect with server successfully;
2. Open “192.168.1.1” in your browser if there is no webpage-skipping;

**Note: Network Configuration**


**Gateway Mode**

Insert the Ethernet cable with gateway WAN port from router LAN port. The gateway will connect with server successfully if System Indicator Light stays on green.

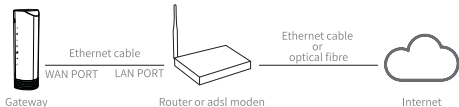

## Wireless Relay Mode

Configure WiFi, without connecting with Ethernet cable. Please change Your Wi-Fi Router Channel according to system promotion if there is channel conflict between WiFi and zigbee network.

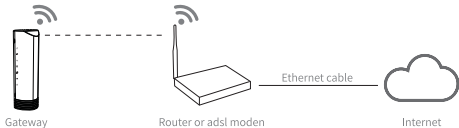


**step 3:** Open smart home app, register and login your account;

**step 4:** Bind gateway after scanning the ID QR code on the bottom of gateway.

## ● Add New Device

1. Click SET Key 4 times(keep the single click time within 1s) and “ZigBee Network Setting Light” will stays yellow in 4 minutes, which means other devices are allowed to add in the network during this time.



2. Login smart home app, click devices list “+” on the right corner to allow devices joining ZigBee network.



**Note:** click SET key 3 times to forbidden devices joining ZigBee network.

## ● Others Settings

### Gateway Router Settings

Open “192.168.1.1” in your browser to configure the function of router after connecting with gateway WiFi.

### Reset Password of Gateway

click SYS key 8 times to reset factory gateway password(latest 6 numbers or letters of gateway ID).

### Exit ZigBee Network

Long press SET key for 10 seconds and the gateway will exit ZigBee network. All devices will be offline.

### Restore factory settings

Long press SYS key for 10 seconds.

## Specifications

Name	Vertical Type Gateway
Material, color	PC+ABS, Black
Net Weight	465g
Dimension	227mm×74.5mm×68.5mm
Working Temperature	-10°C~+55°C
Working Humidity	≤95%RH (noncondensing)
Flame Retardant Rating	UL94 V-2
Power Supply	DC 5V 2A
Consumption	Max7.5W